




Siren

USL-Siren

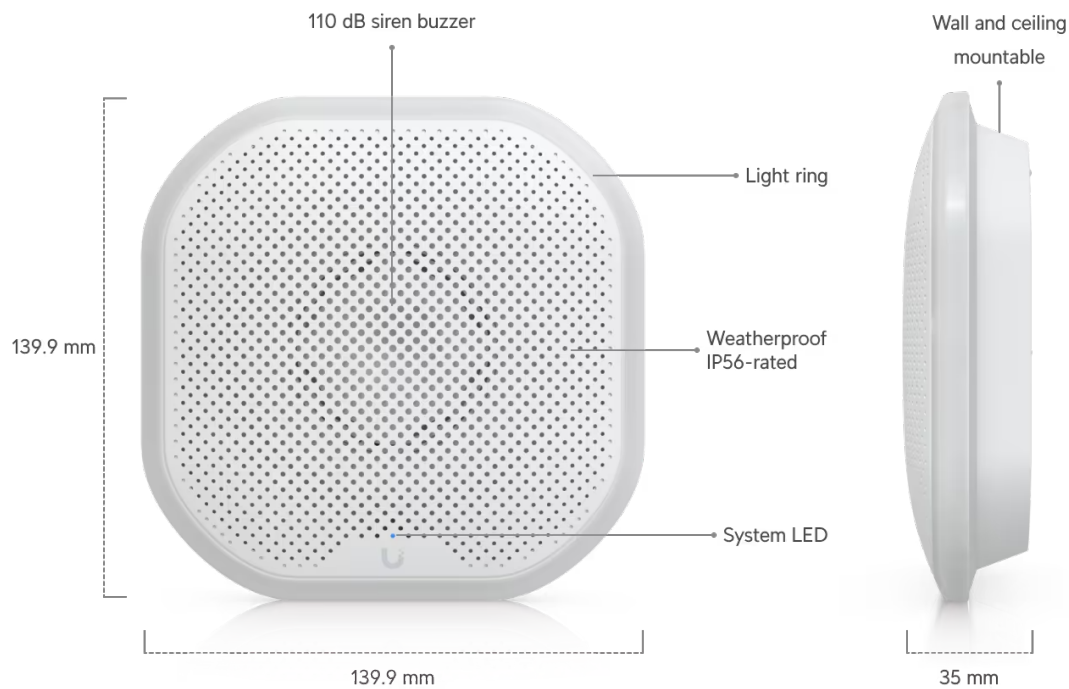

Overview

Dimensions	139.9 x 139.9 x 35 mm (5.5 x 5.5 x 1.4")
Mounting	Wall, ceiling mounting plate (Included)

Mechanical

Weight	345 g (12.2 oz)
Enclosure Material	Aluminum alloy, polycarbonate
Weatherproofing	IP56

Hardware

Power Method	(4) CR123A batteries 12–24V DC
Max. Power Consumption	5W
Input Terminals	(1) Power input (1) Signal input
Connectivity	SuperLink (Proprietary)
Buzzer	✓
Antenna Gain	
• SuperLink	2 dBi
Max. TX Power	
• SuperLink	14 dBm
Operating Frequency	
• US	915.6–927.6 MHz
• EU	865.1–869.5 MHz
Max. Range	
• SuperLink	2 km (1.2 mi)
LEDs	
• System	R/G/B/W
• Light Ring	R/G/B/W
Buttons	(1) Power (1) Factory reset (1) Tamper switch
Ambient Operating Temperature	-30 to 50° C (-22 to 122° F)
Ambient Operating Humidity	5 to 90% noncondensing
Certifications	FCC, IC, CE

NDA Compliant



Software

Management Application

- UniFi Protect Web
- UniFi Protect iOS™ and Android™